



# Sportlume Series Sports Lighter Elite Generation 3



## Description

The LITELUME™ Sportlume Series Sports Lighter Elite Generation 3 (LL-SLE) incorporates an updated optional Remote Power System, eliminating the need for a bucket truck for maintenance and provides flexibility of installation. The LED package, premium driver, built in surge suppression, laser site guide along with upgraded dynamic thermal management are all standard. Featuring a beautiful solid state diecast aluminum body, with a premium patented design, 3G vibration rated, specifically tailored for sports field applications. Controls Ready.

## Fixture Information

Size:	350W/505W/600W
Housing:	Heavy Duty Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Standard: Black (BK) Custom Options Available
Mounting:	Standard: Heavy Duty Yoke Optional: Tenon Mount Adapter Square Beam Mounting Bracket
LED Driver:	Ultra High Efficiency (Up to 95%) Isolated 0-10V/PWM/3-Timer-Modes Dimmable Always-on Auxiliary Power: 12Vdc Controls ready Input Surge Protection: DM 6kV, CM 10kV IP67 and UL Wet / Dry / Damp Location. Built in surge suppression with max 40KV.
Voltage:	Standard: 120-277V, 200-480V
THD:	≤20%
Power Factor:	≥90%
CRI:	70
EPA:	1.89
Operating Temperature:	-40°F to 122°F
Warranty:	10-Year Limited Warranty

## Performance Data

**Lumen Output:**  
52,500 to 92,000 lm

**Lumens Per Watt (typical):**  
140lm/W

**CCT:**  
4000K  
5000K  
5700K

**Beam Angle:**  
4H\*4V  
3H\*3V

**Lifespan:**  
Estimated 100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculation

## Ratings & Certificates


UL Listed For Wet Location  
DLC Qualified  
IP65 rated  
Title 24 Compliant






### Dimension

Item	Width	Length	Height
With Power Box Attached	20.8"	26.9"	16.9"
With Remote Power Box	20.8"	18.8"	16.9"

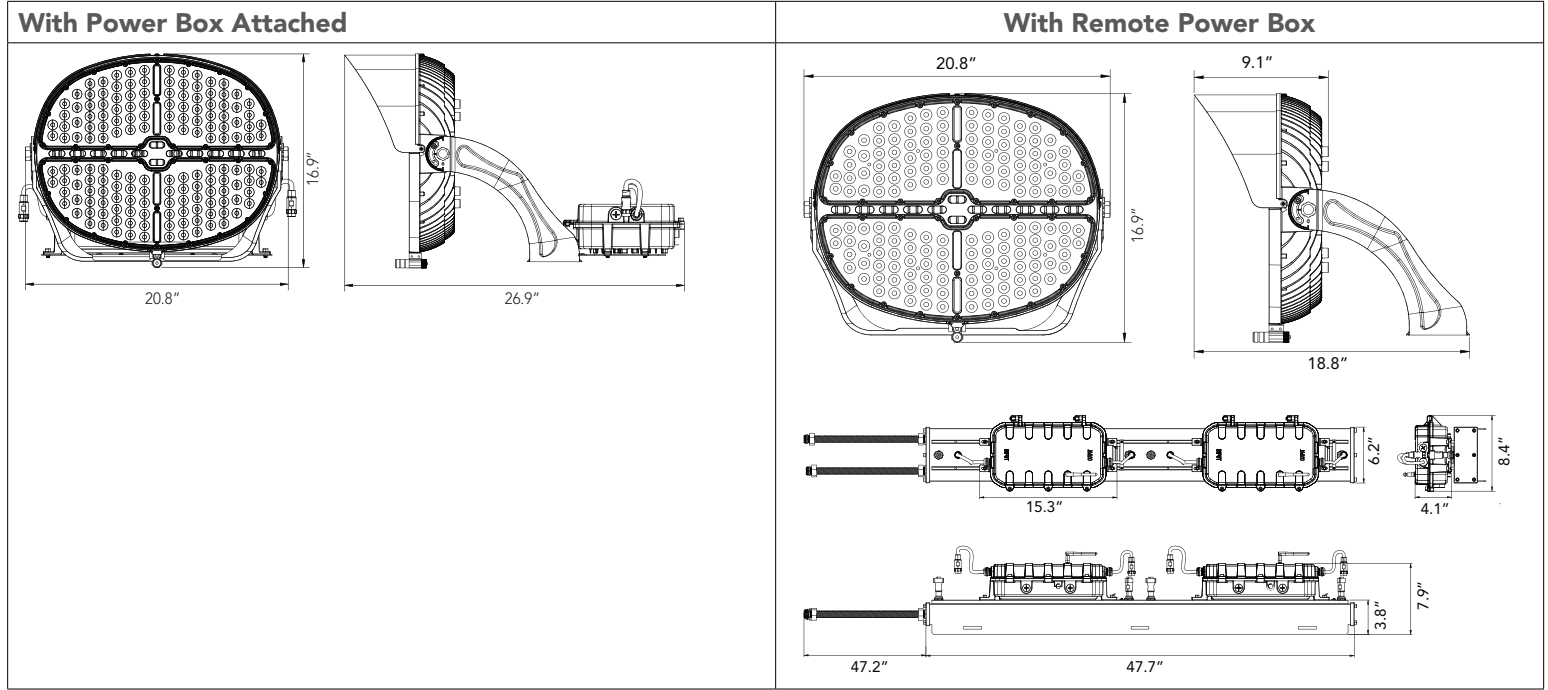



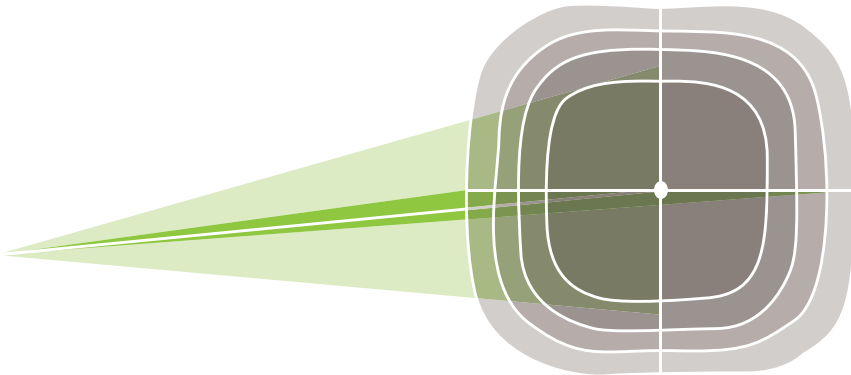





### Photometrics






### Accessories

Black Top Visor (Default) 	Aiming Sight (Default) 	Tenon Mount (Option) 	Square Beam Mounting Bracket (sold separately) 
Extension Cord - Up to 164" 	Power Box Mounting Rail (sold separately) 	Glare Control Shield (Option) 	Integrated Control (Option) 

### Remote Power Box (Optional)


The LL-SLE ( GENERATION 3 ) supports remote installation of the power supply. Simple installation, access and maintenance of the equipment is available with this option by placing the Remote Power Box at the bottom of the pole.

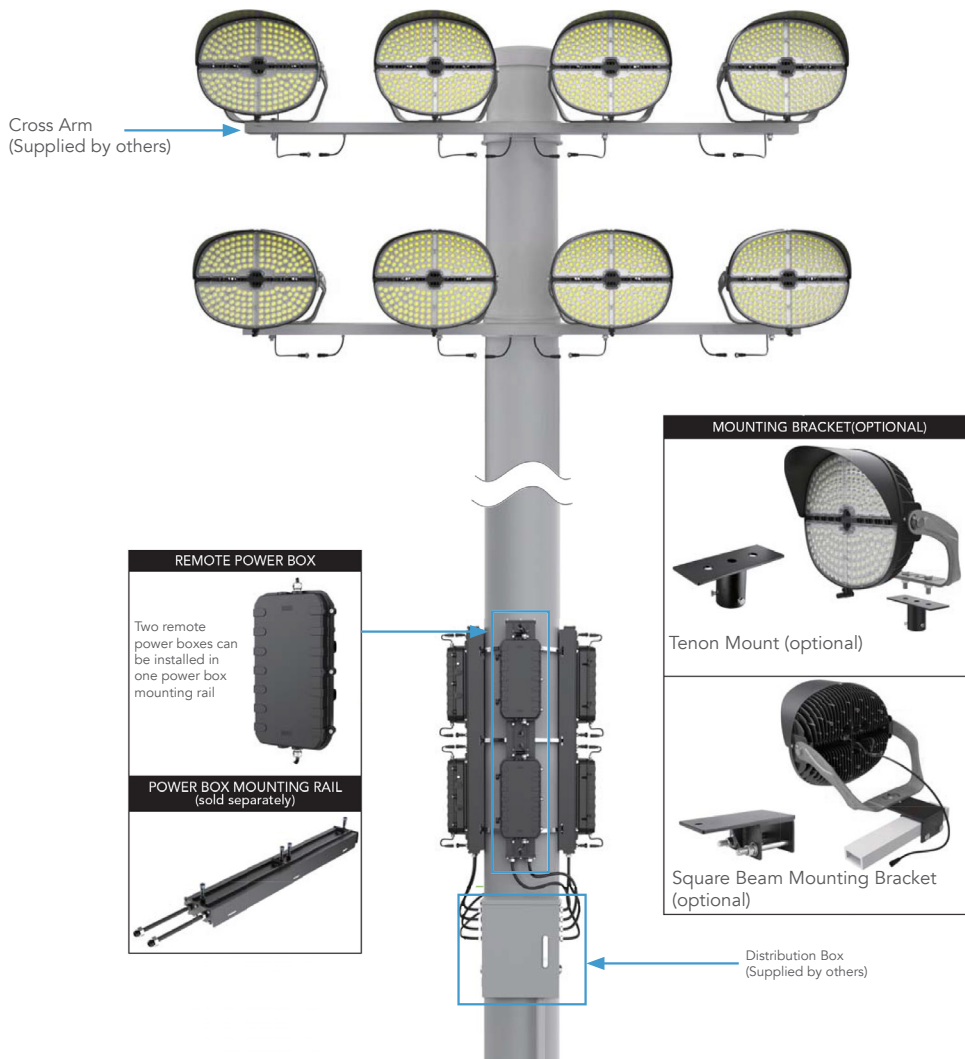




### Power box Attached (Optional)

The LL-SLE ( GENERATION 3 ) supports installation of the power supply directly to the fixture. Simple installation and wiring.

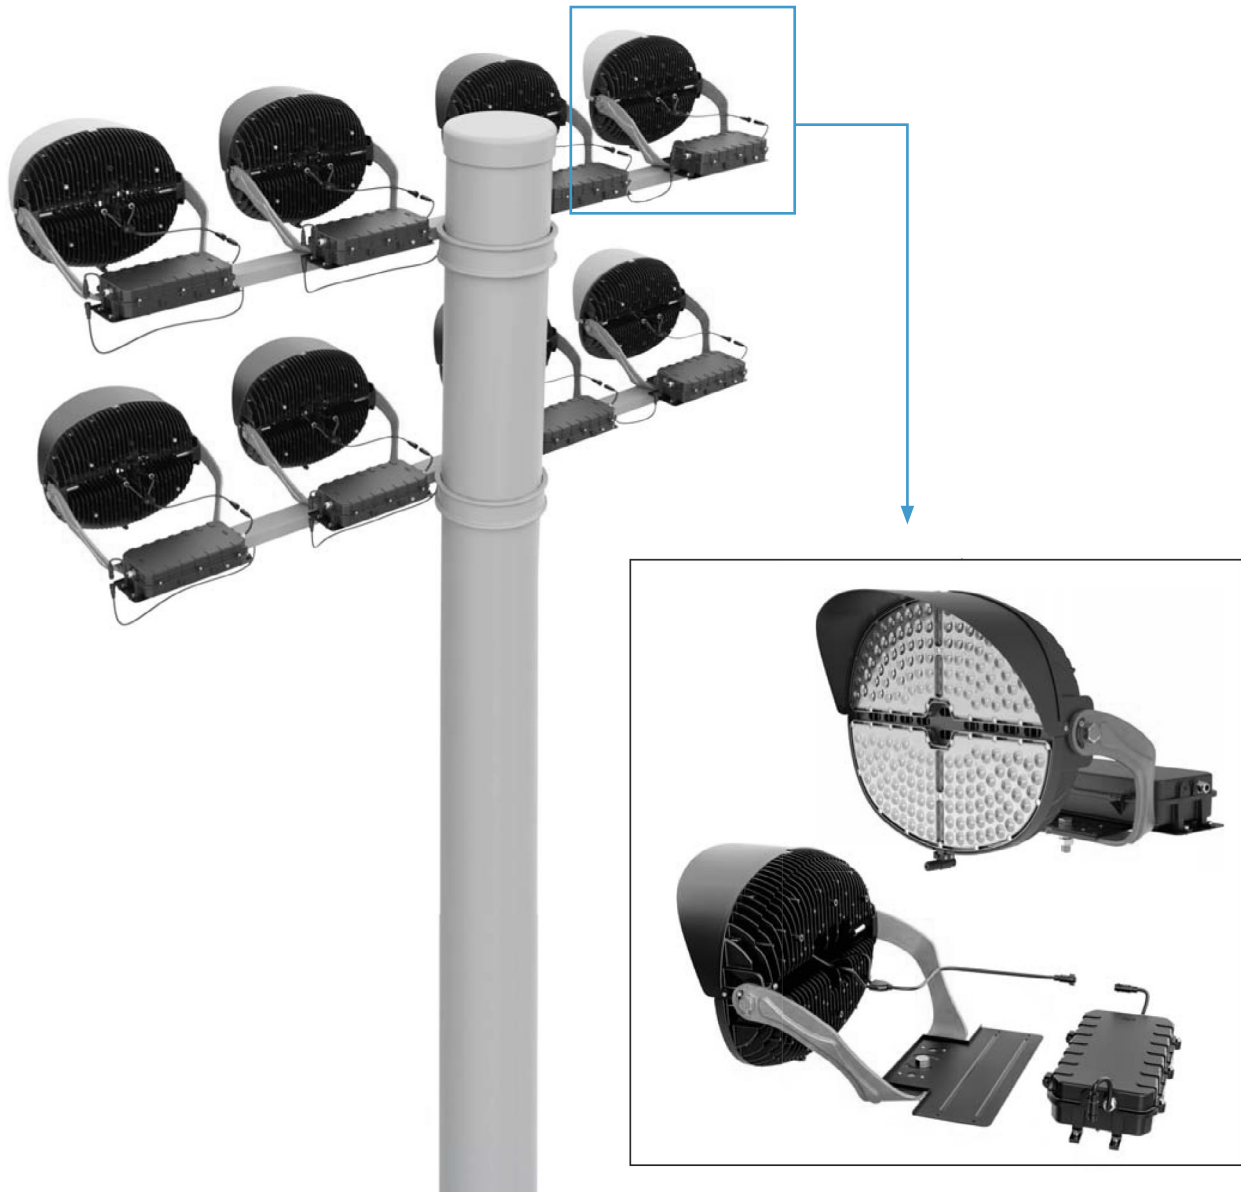

### Integrated Controls

The fixture is compatible with Synapse™ wireless control system, including RGB sport lighting. It offers a smart, stable and imaginative lighting control solution to your sports facility.

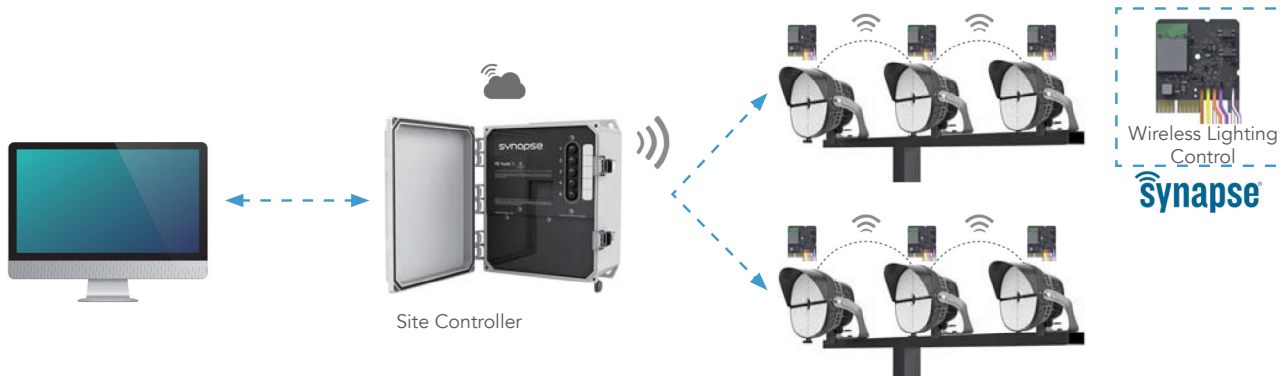



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

## Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-SLE-350-57-UNV-BK	350	52500	5700	120-277
LL-SLE-350-50-UNV-BK	350	53600	5000	120-277
LL-SLE-350-40-UNV-BK	350	53600	4000	120-277
LL-SLE-505-57-UNV-BK	505	68000	5700	120-277
LL-SLE-505-50-UNV-BK	505	70000	5000	120-277
LL-SLE-505-40-UNV-BK	505	70000	4000	120-277
LL-SLE-600-57-UNV-BK	600	90000	5700	120-277
LL-SLE-600-50-UNV-BK	600	92000	5000	120-277
LL-SLE-600-40-UNV-BK	600	92000	4000	120-277
LL-SLE-350-57-480-BK	350	52500	5700	480
LL-SLE-350-50-480-BK	350	53600	5000	480
LL-SLE-350-40-480-BK	350	53600	4000	480
LL-SLE-505-57-480-BK	505	68000	5700	480
LL-SLE-505-50-480-BK	505	70000	5000	480
LL-SLE-505-40-480-BK	505	70000	4000	480
LL-SLE-600-57-480-BK	600	90000	5700	200-480
LL-SLE-600-50-480-BK	600	92000	5000	200-480
LL-SLE-600-40-480-BK	600	92000	4000	200-480

## Accessory Ordering Information

Part #	Description
SBMB-BK	Square Beam Mounting Bracket, Black
SLE-TM-MP	Tenon Mount and Mounting Plate For Sport Lighter Elite
RPB	Remote Power Box Installation
SL-PBMR	Power Box Mounting Rail
RPB-C35BK-QC	Remote Power Box Cord, 35', Black, 600v, 18 Gauge, 3 Conductor, Quick Disconnect
RPB-C65BK-QC	Remote Power Box Cord, 65', Black, 600v, 18 Gauge, 3 Conductor, Quick Disconnect
4HX4V	NEMA 4H X 4V Distribution <b>*MUST SELECT BEAM ANGLE</b>
3HX3V	NEMA 3H X 3V Distribution <b>*MUST SELECT BEAM ANGLE</b>
Wireless Controls:LL-DIM10-087-06-A	Dim10-087-06-A Wireless Controller <b>*each fixture</b>
Wireless Controls:LL-KIT-ANT18-01	Antena <b>*each fixture</b>
Wireless Controls:WIRELESS LABOR	Labor To Install Wireless Components <b>*each fixture</b>
Wireless Controls:LL-CBSSW-450-002	Central Base Station Ss450-Based Model W/ 5-Button Switch <b>*1 per project</b>
Wireless Controls:COMMISSIONING SERVICES	Commissioning Services <b>*1 per project up to 100 units</b>

## Buy American Act Compliant Ordering Information

Part #	Description
BAA-SLE	Buy American Act Compliant for Sports Lighter Elite