



Description

Remote Capable Incandescent Emergency Unit

Illumination:

- Adjustable, glare-free PAR-Type lamp heads with 7.2W (on 6V models) and 9/12W (on 12V models) incandescent lamps

Electrical:

- Dual 120/277 voltage standard
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V sealed lead acid, maintenance-free, rechargeable battery
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.

Housing:

- Injection-molded, engineering grade, 5VA fl ame retardant, high-impact thermoplastic construction.

Warranty/Listing:


- HTR: Optional internal heater for cold temperature applications
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

Warranty/Listing:

- Seven year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for dry locations (25°C).



Dimensions:

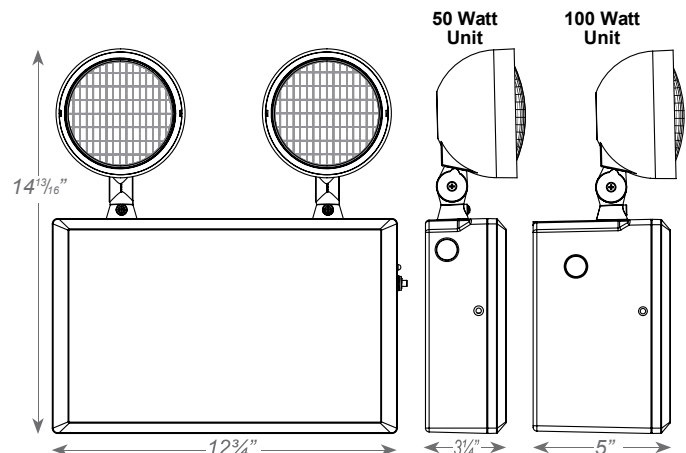



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	Voltage		Capacity		Options	
LL-DXR	6 12	6V ² 12V ²	5 10	50W 100W	HTR 20SB USA	Internal Heater ¹ 12V20W Sealed Beam Halogen ² Assembled in USA

¹ Available with 50W units only.

² Available with 100W units only.