



LED Strip Linear Econolume Series



Description

The LITELUME Strip Linear Econolume Series (LL-SLECO) features a 2 3/8" Slim design with a PMMA lens and Steel Housing making it suitable for many applications. The multi-functional channel comes in 2', 3', 4' and 8' lengths with 0-10v dimming drivers standard to satisfy a variety of purposes. Secondary controls, sensors and emergency battery backup is available in addition to multiple mounting options. An Excellent choice for grocery, retail, warehouse, shop, storage, utility, coves, and any general lighting.

Fixture Information

Size:	20W/25W/35W/65W
Housing:	Steel
Finish:	Protective powdercoat
Color:	Standard: White
Mounting:	Standard: Surface Mount Suspended Mount
Lens:	PMMA
Dimming:	Standard 0-10v
Operating Temperature:	-4° F to 122° F
Power Factor:	.95
CRI:	80
Voltage:	Standard: 120-277V
Sensor:	Standard: No sensor
Warranty:	5-Year Limited Warranty

Performance Data

Lumen Output:

2,582 to 8,135 lm

Lumens Per Watt (typical):

127 to 134 lm/W

CCT:

3500K
4000K
5000K

Lifespan:

Up to 122,000 running hours

Ratings & Certificates


UL Listed
Damp Location Listed
Complies with FCC Part 15, Class A.
Low risk of flicker per IEEE1789-2015 at 100% light output.
Complies with IEEE C.62.41-1991, Class A input transient surge protection (2.0kV).
Complies with RoHS (Restriction on Hazardous Substances) requirements






Dimension

Item	Length	Width	Height	Weight
2 ft	22.25"	2.375"	2.75"	2.4 lbs
3 ft	35.00"	2.375"	2.75"	3.1 lbs
4 ft	47.375"	2.375"	2.75"	3.7 lbs
8 ft	94.25"	2.375"	2.75"	7.5 lbs

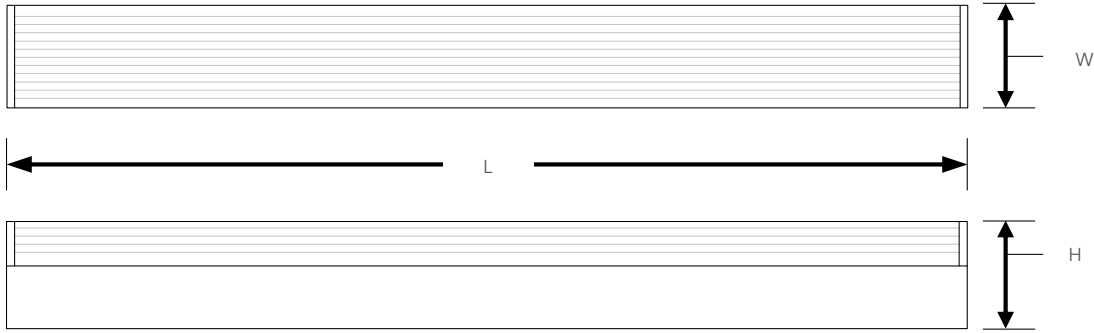

Photometrics

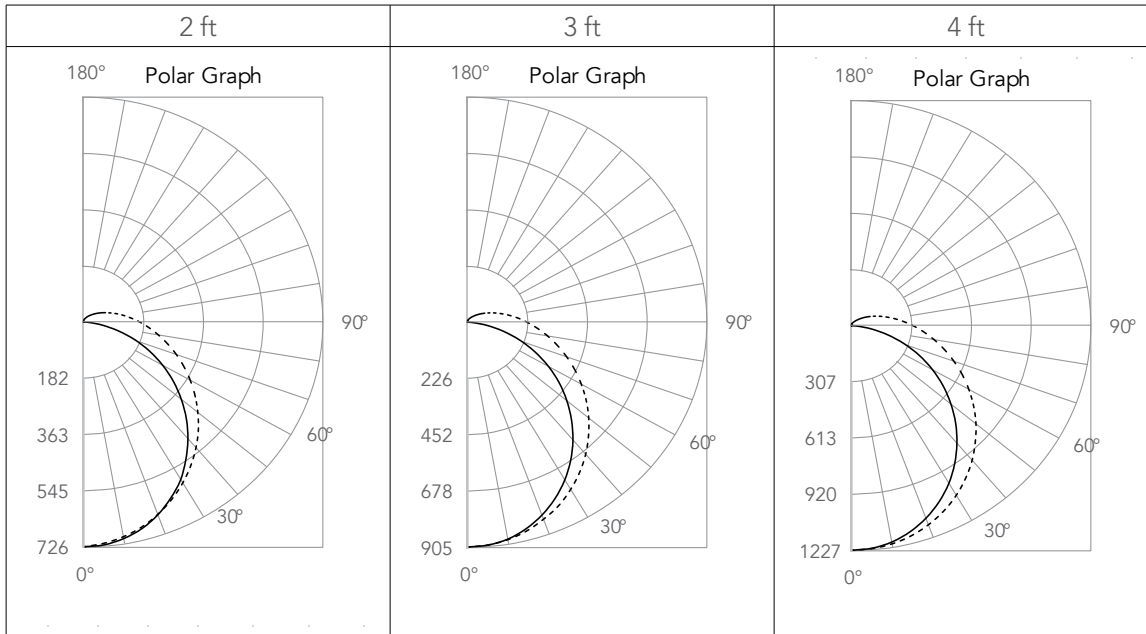



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-SLECO-2-20-50-UNV-WH	20	2613	5000	120-277
LL-SLECO-2-20-40-UNV-WH	20	2592	4000	120-277
LL-SLECO-2-20-35-UNV-WH	20	2582	3500	120-277
LL-SLECO-3-25-50-UNV-WH	25	3186	5000	120-277
LL-SLECO-3-25-40-UNV-WH	25	3154	4000	120-277
LL-SLECO-3-25-35-UNV-WH	25	3138	3500	120-277
LL-SLECO-4-35-50-UNV-WH	35	4382	5000	120-277
LL-SLECO-4-35-40-UNV-WH	35	4313	4000	120-277
LL-SLECO-4-35-35-UNV-WH	35	4278	3500	120-277
LL-SLECO-8-65-50-UNV-WH	65	8135	5000	120-277
LL-SLECO-8-65-40-UNV-WH	65	8131	4000	120-277
LL-SLECO-8-65-35-UNV-WH	65	8129	3500	120-277

* Please contact LITELUME for all Custom Option Requests