



LED Strip Linear Standard Series



Description

The LITELUME Strip Linear Standard Series (LL-SLST) features a 3.3" wide design with a PMMA lens and Steel Housing making it suitable for many applications. The multi-functional channel comes in 2', 3', 4' and 8' lengths with 0-10v dimming drivers standard to satisfy a variety of purposes. Secondary controls, sensors and emergency battery backup is available in addition to multiple mounting options. An Excellent choice for grocery, retail, warehouse, shop, storage, utility, coves, and any general lighting.

Fixture Information

Size:	20W/25W/35W/65W
Housing:	Steel
Finish:	Protective powdercoat
Color:	Standard: White
Mounting:	Standard: Surface Mount Suspended Mount
Lens:	PMMA
Accessories:	Emergency Back-up Battery Sensors
Dimming:	0-10V
Operating Temperature:	-4° F to 122° F
Power Factor:	.95
CRI:	80
Voltage:	Standard: 120-277V
Sensor:	Standard: No sensor Bi-Level PIR motion sensor Microwave Motion Sensor
Warranty:	5-Year Limited Warranty

Performance Data

Lumen Output:

2,527 to 9,002 lm

Lumens Per Watt (typical):

128 to 138 lm/W

CCT:

3500K
4000K
5000K

Lifespan:

Up to 190,000 running hours

Ratings & Certificates


UL Listed
Damp Location Listed
Complies with FCC Part 15, Class A.
Low risk of flicker per IEEE1789-2015 at 100% light output.
Complies with IEEE C.62.41-1991, Class A input transient surge protection (2.0kV).
Complies with RoHS (Restriction on Hazardous Substances) requirements






Dimension

Item	Length	Width	Height	Weight
2 ft	22.2"	3.3"	3.6"	2.6 lbs
3 ft	35.00"	3.3"	3.6"	3.7 lbs
4 ft	47.3"	3.3"	3.6"	5.3 lbs
8 ft	94.2"	3.3"	3.6"	10.4 lbs

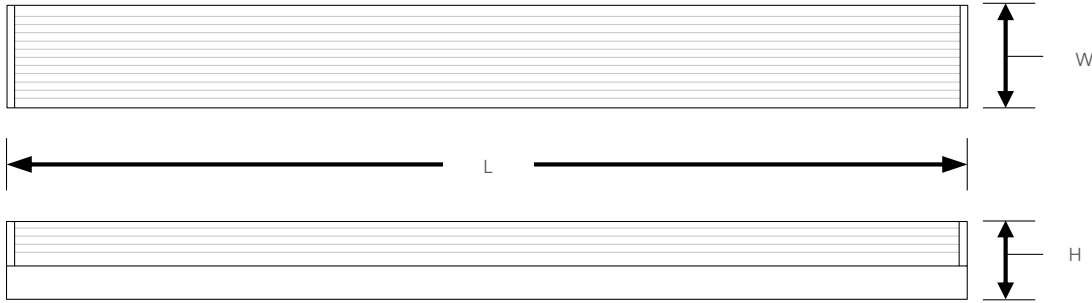

Photometrics

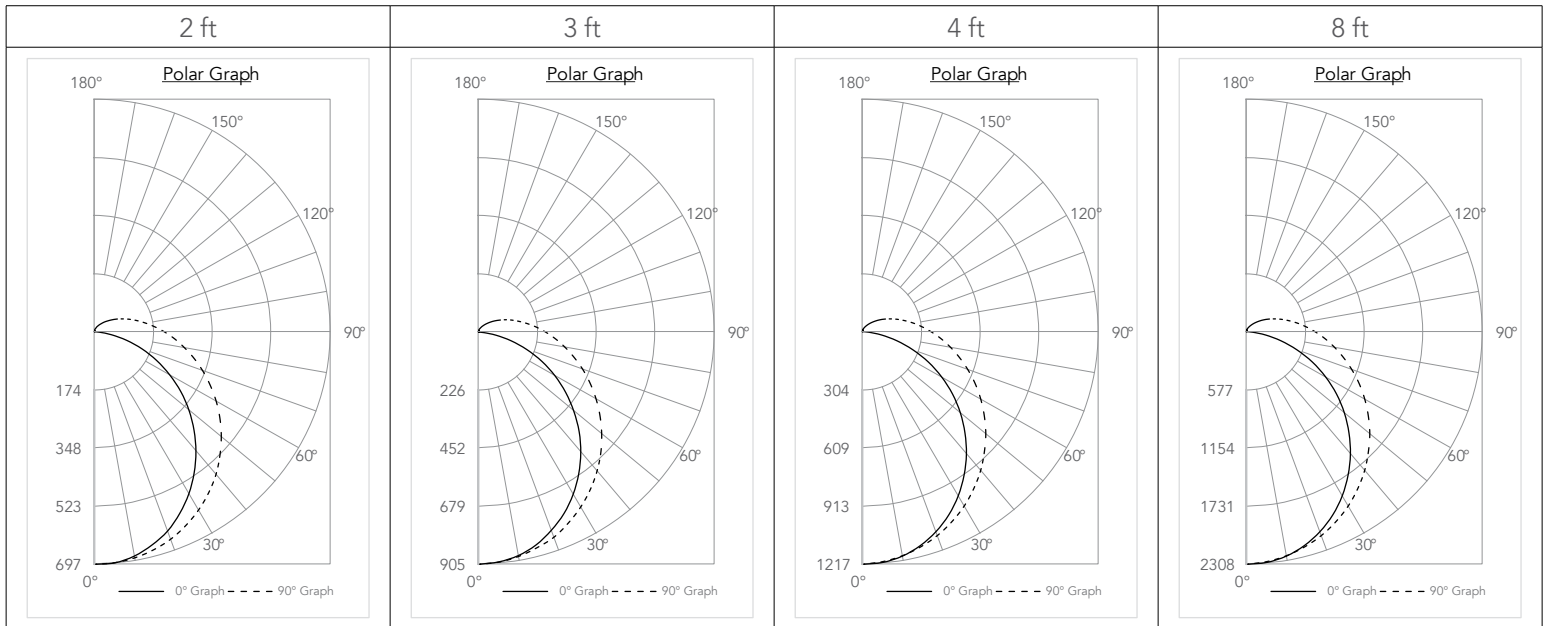



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-SLST-2-20-50-UNV-WH	20	2545	5000	120-277
LL-SLST-2-20-40-UNV-WH	20	2540	4000	120-277
LL-SLST-2-20-35-UNV-WH	20	2527	3500	120-277
LL-SLST-3-25-50-UNV-WH	25	3324	5000	120-277
LL-SLST-3-25-40-UNV-WH	25	3279	4000	120-277
LL-SLST-3-25-35-UNV-WH	25	3264	3500	120-277
LL-SLST-4-35-50-UNV-WH	35	4615	5000	120-277
LL-SLST-4-35-40-UNV-WH	35	4600	4000	120-277
LL-SLST-4-35-35-UNV-WH	35	4577	3500	120-277
LL-SLST-8-65-50-UNV-WH	65	9002	5000	120-277
LL-SLST-8-65-40-UNV-WH	65	8874	4000	120-277
LL-SLST-8-65-35-UNV-WH	65	8765	3500	120-277

* Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Wattage
MMS	Microwave Motion Sensor
PIRMS	Passive Infrared Motion Sensor
SL2WW	Wire Guard Kit 2'
SL3WG	Wire Guard Kit 3'
SL4WG	Wire Guard Kit 4'
SL8WG	Wire Guard Kit 8'
EM800	Emergency Battery Back Up, 800 lm, 90 Minutes **3', 4', And 8' Only**
EM1200	Emergency Battery Back Up, 1200 lm, 90 Minutes **4' And 8' Only**
EM1600	Emergency Battery Back Up, 1600 lm, 90 Minutes **4' And 8' Only**
EM2000	Emergency Battery Back Up, 2000 lm, 90 Minutes **8' Only**
EM2400	Emergency Battery Back Up, 2400 lm, 90 Minutes **8' Only**

* Please contact LITELUME for all Custom Option Requests