



Ceiling Round Glo



Description

The LITELUME™ Ceiling Round Glo (LL-CRG) features a die-formed cold rolled steel housing in brushed aluminum, optional oil rubbed bronze with a diffused glass lens creating a uniformed soft appearance. Featuring 2 different sizes and wattages, available in ceiling or suspended mount. Available in 3000k, high power factor and low THD.

Applications: hospitality and entertainment.

Fixture Information

Size:	23W/35W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard: Brushed Aluminum (BA) Optional: Oil Rubbed Bronze (ORB)
Mounting:	Standard: Ceiling Mount, Suspended Mount
Lens:	Diffused Glass
CRI:	80
Power Factor:	.90
Voltage:	Standard: 120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

1900 to 2670 lm

Lumens Per Watt (typical):

76 to 82 lm/W

CCT:

3000K

Ratings & Certificates


ETL/cETL Listed
Damp Location Listed





Dimension

Item	Diameter (a)	Height (b)
23W	15.0"	2.6"
35W	19.0"	2.6"
23W (Suspended)	15.0"	Adjustable up to 6ft
35W (Suspended)	19.0"	Adjustable up to 6ft

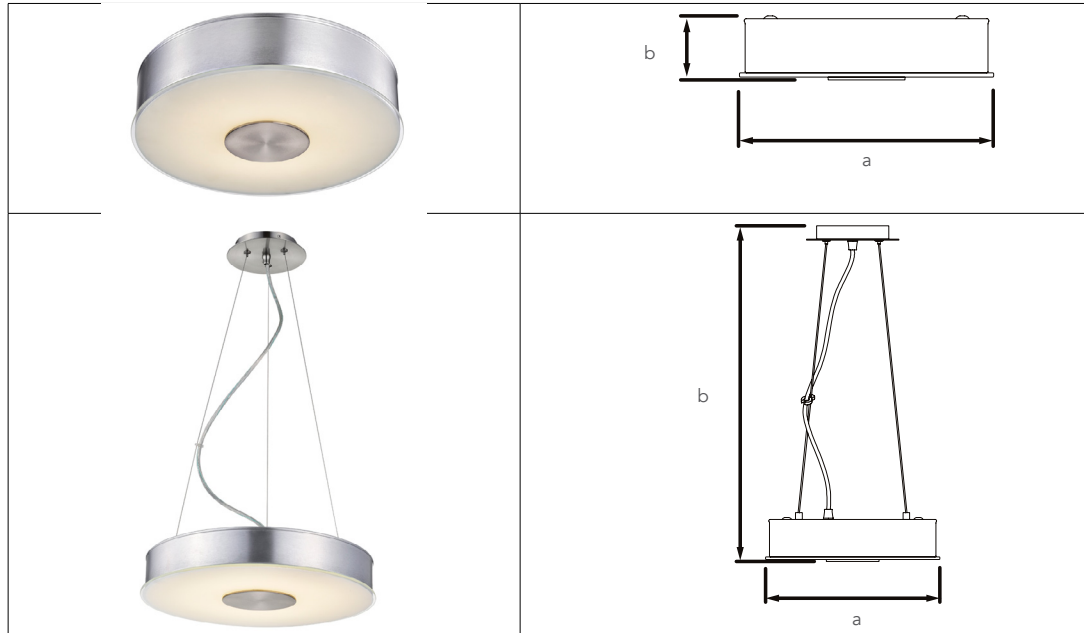



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CRG-23-30-UNV-BA	23	1900	3000	120-277	Brushed Aluminum
LL-CRG-23-30-UNV-ORB	23	1900	3000	120-277	Oil Rubbed Bronze
LL-CRG-35-30-UNV-BA	35	2670	3000	120-277	Brushed Aluminum
LL-CRG-35-30-UNV-ORB	35	2670	3000	120-277	Oil Rubbed Bronze

Suspended Mount

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CRG-SM-23-30-UNV-BA	23	1900	3000	120-277	Brushed Aluminum
LL-CRG-SM-23-30-UNV-ORB	23	1900	3000	120-277	Oil Rubbed Bronze
LL-CRG-SM-35-30-UNV-BA	35	2670	3000	120-277	Brushed Aluminum
LL-CRG-SM-35-30-UNV-ORB	35	2670	3000	120-277	Oil Rubbed Bronze