



# Vaportite High Bay



## Description

The Litelume LED Vaportite High Bay (LL-VTHB) is a suspended or surface mounted vapor proof luminaire designed for retrofit or new construction. Our Injection molded one piece body features a chemical resistant finish for rigidity, durability and prolonged life in rough environments. Weatherability IP66 rated housing. Quick mount and installation. Stainless steel latches fastened to housing to safely secure the lens to housing. Designed to achieve maximum performance and improved lighting.

Applications include parking garage, car wash, tunnels, stairwell lighting, commercial and industrial with applicable building and safety codes.

## Fixture Information

Size:	100W/150W/200W
Housing:	Polycarbonate
Lens:	Diffused Polycarbonate
Mounting:	Standard: Surface Mount, Suspended Mount
Accessories:	Emergency Back-up Battery
CRI:	82
Temperature:	-35° F to 104° F
Voltage:	Standard: 120-277V Optional: 480v
Power Factor:	.95
Sensor:	Standard: No sensor Optional: Integrated Microwave Motion sensor, external sensor, daylight harvesting
Dimming:	0-10V
Warranty:	5-Year Limited Warranty

## Performance Data

### Lumen Output:

12,610 to 26,000 lm

### Lumens Per Watt (typical):

126 to 130 lm/W

### CCT:

4000K  
5000K

### Lifespan:

Up to 100,000 hrs

## Ratings & Certificates



ETL Listed  
Wet Locations  
IP66 rated  
NSF  
NEMA 4X





## Dimension

Item	Depth	Height	Length
100W/150W/200W	10.00"	4.52"	50.00"

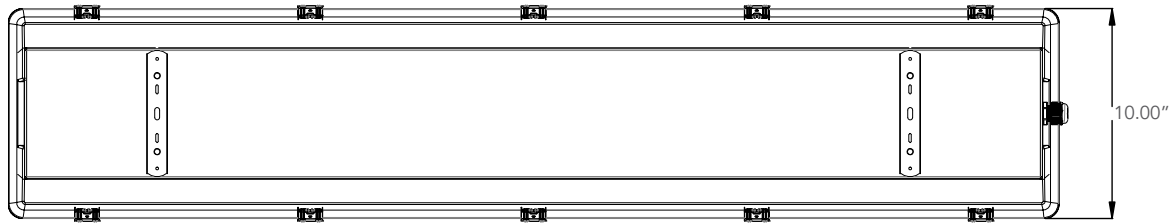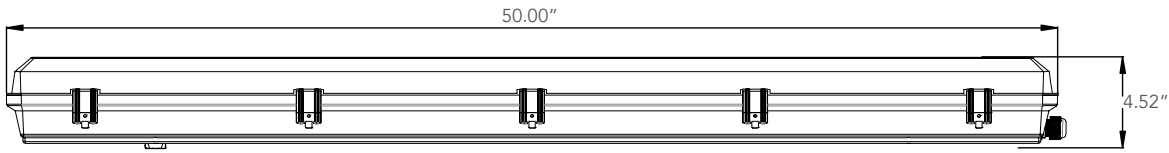



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

## Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-VTHB-100-50-UNV-WH	100	13000	5000	120-277	White
LL-VTHB-100-40-UNV-WH	100	12610	4000	120-277	White
LL-VTHB-150-50-UNV-WH	150	19500	5000	120-277	White
LL-VTHB-150-40-UNV-WH	150	18915	4000	120-277	White
LL-VTHB-200-50-UNV-WH	200	26000	5000	120-277	White
LL-VTHB-200-40-UNV-WH	200	25220	4000	120-277	White

## Accessories Ordering Information

Part #	Description
MMS	Microwave Motion Sensor
DH	Daylight Harvesting <b>**Must Order With MMS**</b>
EMS	External Motion Sensor
EM700	Emergency Battery Back Up, 700 lm, 90 Minutes
EM1400	Emergency Battery Back Up, 1400 lm, 90 Minutes
SUB "UNV" WITH "480"	480 Volt

\* Please contact LITELUME for all Custom Option Requests