



# LED Bollard Round High Lumen 8 Series



BRPDT



BRPFT



BRLDT



BRLFT

## Description

The LITELUME™ Bollard Collection (LL-B) features an anti-corrosion, shock resistant heavy duty die-cast aluminum housing for long-lasting durability. Easy installation and maintenance due to our self-oriented top cover design. A wide range of sizes and lumen packages allow for variety of applications. Introducing the Round High Lumen 8 Series.

Applications: Security, Pathway, Perimeter, Pedestrian and Walkway lighting.

## Fixture Information

Size:	35W/60W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze(BZ), Anthracite Gray(LBK) Custom Options: White(WH), Black(BK) and Gray(GY)
Power Factor:	.95
CRI:	80
Voltage:	Standard: 120-277V
Sensor:	Standard: No sensor
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

2200 to 6000 lm

### Lumens Per Watt (typical):

62 to 100 lm/W

### CCT:

3000K  
4000K  
5000K

### Distribution:

T5 120D

### Lifespan:

100,000 hours

## Ratings & Certificates


ETL Listed for Wet Location  
IP65 Listed






## Dimensions

Item	Diameter	Length
Round Top Louver (BRLDT)	8.375"	42.00"
Round Top Parabolic (BRPDT)	8.375"	40.56"
Flat Top Louver (BRLFT)	8.375"	42.00"
Flat Top Parabolic (BRPFT)	8.375"	40.56"

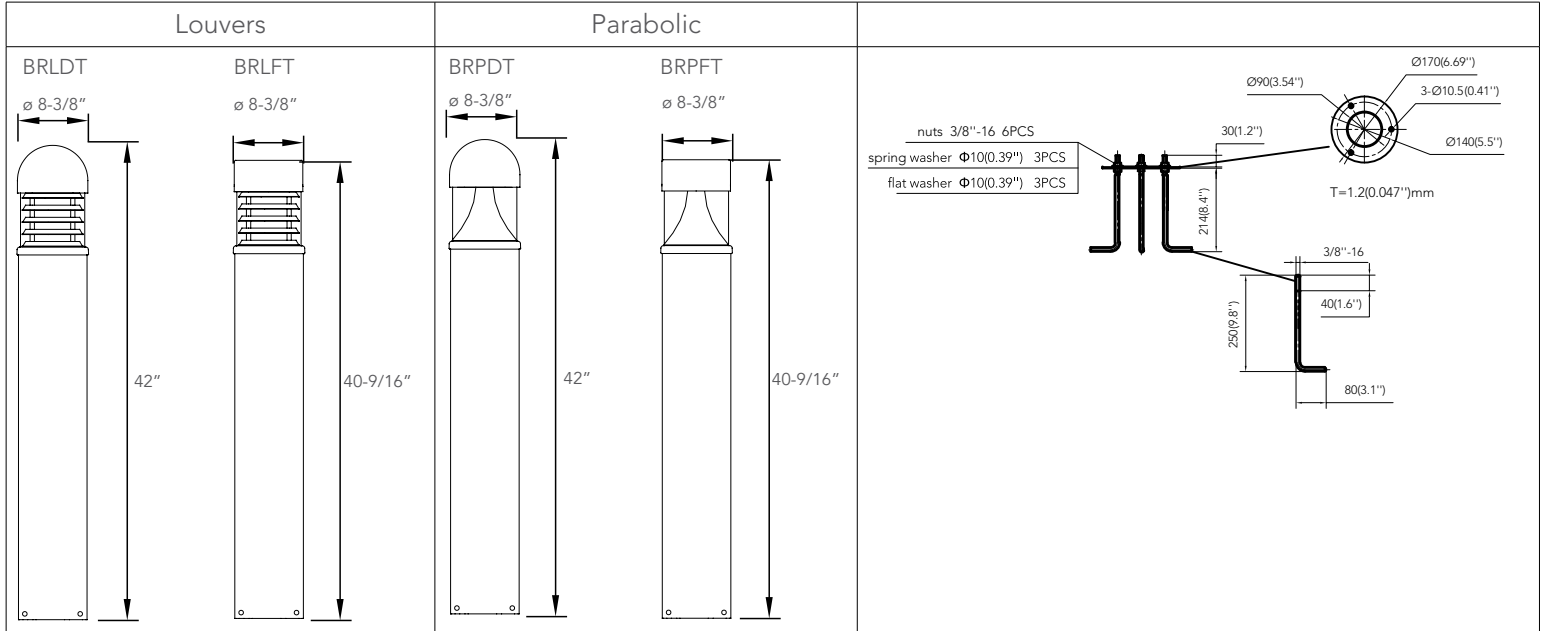


## Photometric Data

Louvers

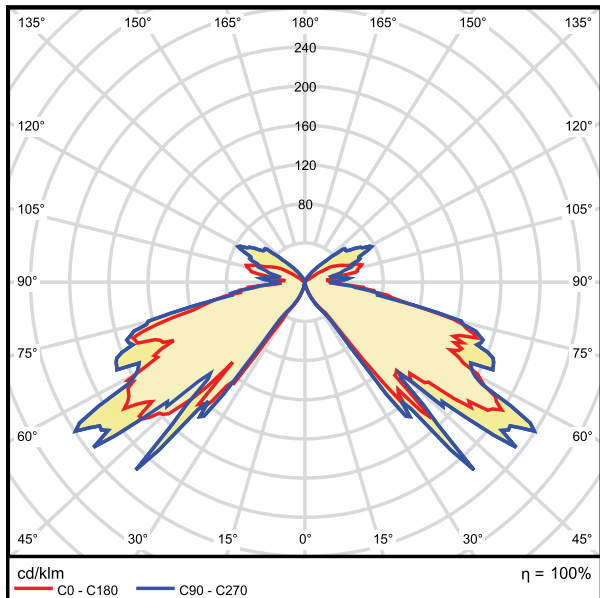

Prismatic

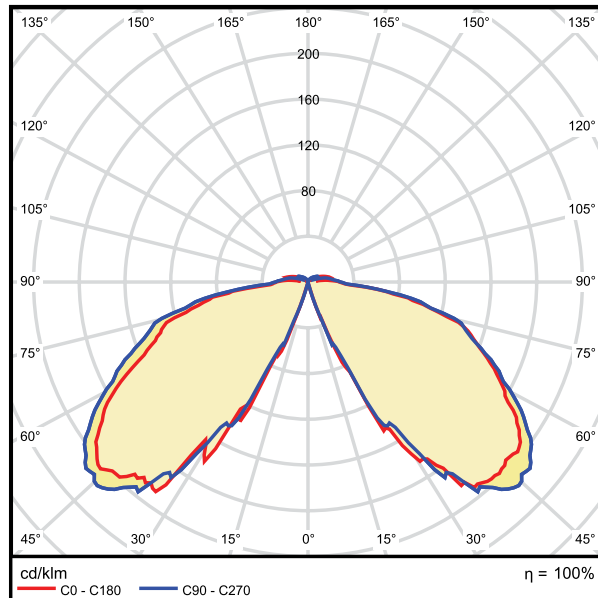



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Type Distribution	Color
LL-BRLDTHL8-35-50-UNV-BZ	35	2450	5000K	120-277	T5 120D	Bronze
LL-BRLDTHL8-35-40-UNV-BZ	35	2320	4000K	120-277	T5 120D	Bronze
LL-BRLDTHL8-35-30-UNV-BZ	35	2200	3000K	120-277	T5 120D	Bronze
LL-BRLDTHL8-35-50-UNV-LBK	35	2450	5000K	120-277	T5 120D	Anthracite Gray
LL-BRLDTHL8-35-40-UNV-LBK	35	2320	4000K	120-277	T5 120D	Anthracite Gray
LL-BRLDTHL8-35-30-UNV-LBK	35	2200	3000K	120-277	T5 120D	Anthracite Gray
LL-BRLFTHL8-35-50-UNV-BZ	35	2450	5000K	120-277	T5 120D	Bronze
LL-BRLFTHL8-35-40-UNV-BZ	35	2320	4000K	120-277	T5 120D	Bronze
LL-BRLFTHL8-35-30-UNV-BZ	35	2200	3000K	120-277	T5 120D	Bronze
LL-BRLFTHL8-35-50-UNV-LBK	35	2450	5000K	120-277	T5 120D	Anthracite Gray
LL-BRLFTHL8-35-40-UNV-LBK	35	2320	4000K	120-277	T5 120D	Anthracite Gray
LL-BRLFTHL8-35-30-UNV-LBK	35	2200	3000K	120-277	T5 120D	Anthracite Gray
LL-BRPDTHL8-35-50-UNV-BZ	35	3500	5000K	120-277	T5 150D	Bronze
LL-BRPDTHL8-35-40-UNV-BZ	35	3325	4000K	120-277	T5 150D	Bronze
LL-BRPDTHL8-35-30-UNV-BZ	35	3150	3000K	120-277	T5 150D	Bronze
LL-BRPDTHL8-35-50-UNV-LBK	35	3500	5000K	120-277	T5 150D	Anthracite Gray
LL-BRPDTHL8-35-40-UNV-LBK	35	3325	4000K	120-277	T5 150D	Anthracite Gray
LL-BRPDTHL8-35-30-UNV-LBK	35	3150	3000K	120-277	T5 150D	Anthracite Gray
LL-BRPFTHL8-35-50-UNV-BZ	35	3500	5000K	120-277	T5 150D	Bronze
LL-BRPFTHL8-35-40-UNV-BZ	35	3325	4000K	120-277	T5 150D	Bronze
LL-BRPFTHL8-35-30-UNV-BZ	35	3150	3000K	120-277	T5 150D	Bronze
LL-BRPFTHL8-35-50-UNV-LBK	35	3500	5000K	120-277	T5 150D	Anthracite Gray
LL-BRPFTHL8-35-40-UNV-LBK	35	3325	4000K	120-277	T5 150D	Anthracite Gray
LL-BRPFTHL8-35-30-UNV-LBK	35	3150	3000K	120-277	T5 150D	Anthracite Gray
LL-BRPDTHL8-60-50-UNV-BZ	60	6000	5000K	120-277	T5 150D	Bronze
LL-BRPDTHL8-60-40-UNV-BZ	60	5700	4000K	120-277	T5 150D	Bronze
LL-BRPDTHL8-60-30-UNV-BZ	60	5400	3000K	120-277	T5 150D	Bronze
LL-BRPDTHL8-60-50-UNV-LBK	60	6000	5000K	120-277	T5 150D	Anthracite Gray
LL-BRPDTHL8-60-40-UNV-LBK	60	5700	4000K	120-277	T5 150D	Anthracite Gray
LL-BRPDTHL8-60-30-UNV-LBK	60	5400	3000K	120-277	T5 150D	Anthracite Gray
LL-BRPFTHL8-60-50-UNV-BZ	60	6000	5000K	120-277	T5 150D	Bronze
LL-BRPFTHL8-60-40-UNV-BZ	60	5700	4000K	120-277	T5 150D	Bronze
LL-BRPFTHL8-60-30-UNV-BZ	60	5400	3000K	120-277	T5 150D	Bronze
LL-BRPFTHL8-60-50-UNV-LBK	60	6000	5000K	120-277	T5 150D	Anthracite Gray
LL-BRPFTHL8-60-40-UNV-LBK	60	5700	4000K	120-277	T5 150D	Anthracite Gray
LL-BRPFTHL8-60-30-UNV-LBK	60	5400	3000K	120-277	T5 150D	Anthracite Gray

\* Please contact LITELUME for all Custom Option Requests



### Accessories Ordering Information

Part #	Wattage
EM7	Emergency Battery Back Up 7W
BRPFTHL-HSS	House Side Shield For BRPFTHL
BRPDTHL-HSS	House Side Shield For BRPDTHL
SUB "UNV" WITH "480"	480 Volt

\* Please contact LITELUME for all Custom Option Requests

### Buy American Act Compliant Ordering Information

Part #	Description
BAA-B	Buy American Act Compliant for Bollard

\* Please contact LITELUME for all Custom Option Requests