



# Flood Light Extra Large Double Size



## Description

The LITELUME™ Floodlight (LL-FL) Extra Large Double Size is a high performance LED solution designed with versatility and a slim, low profile design. The rugged, die-cast aluminum housing with UV resistant powder coat finish minimizes wind load requirements and features an integral, watertight LED driver compartment along with high performance aluminum heat sinks.

Applications: Parking lots, Auto dealerships, Billboard, Façade, Wall Washing, Landscape, and general outdoor lighting.

## Fixture Information

Size:	350W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (BY)
Mounting:	Yoke Mount
Lens:	High Performance Acrylic NEMA 7H*6V optics. Optional NEMA 4H*4V optics.
CRI:	80
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V
Sensor:	Standard: No sensor Custom: Button Photocell (120-277V)
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

48,000 to 50,000 lm

### Lumens Per Watt (typical):

137 to 142 lm/W

### CCT:

3000K  
4000K  
5000K

### Beam Angle:

7H\*6V  
Optional 4H\*4V

### Lifespan:

Features Philip Lumileds with up to 100,000 running

## Ratings & Certificates

UL Listed For Wet Location  
IP65 rated




## Wattage Replacement

Existing Watts	Litelume Watts
1000-1500W	350W




### Dimension

Item	Width	Length	Height	Weight
Floodlight Large Extra Large Double Size	5.23"	16.64"	19.27"	31.27"

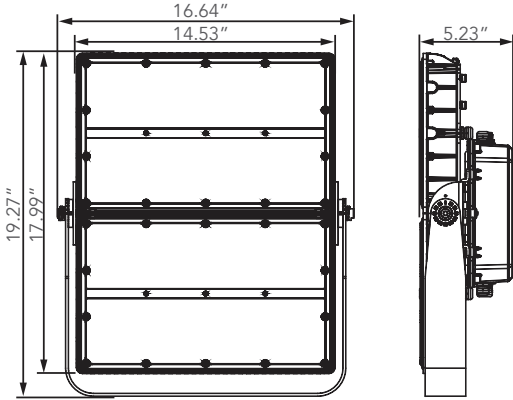


### Photometrics

#### 7H\*6V

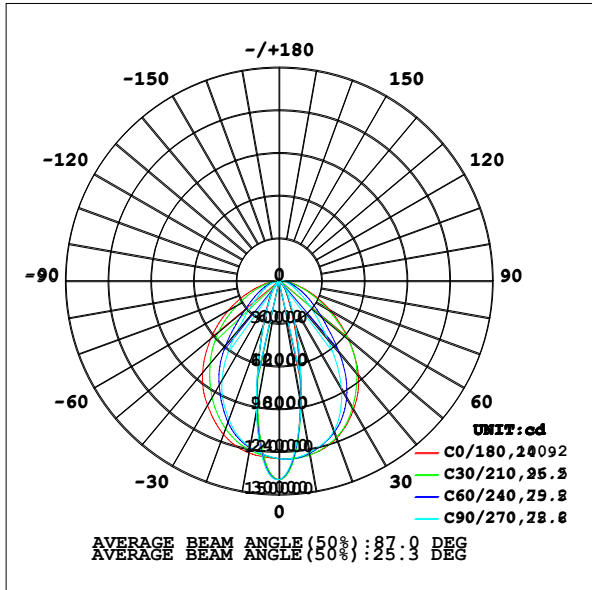

#### 4H\*4V

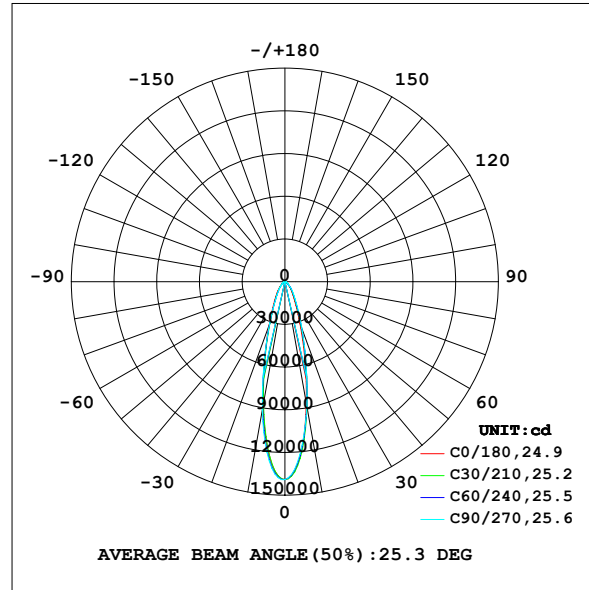



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Beam Angle
LL-FL-350-50-UNV-N76-BZ-YM	350	50000	5000	120-277	7H*6V
LL-FL-350-40-UNV-N76-BZ-YM	350	50000	4000	120-277	7H*6V
LL-FL-350-30-UNV-N76-BZ-YM	350	48000	3000	120-277	7H*6V
LL-FL-350-50-UNV-N44-BZ-YM	350	49500	5000	120-277	4H*4V
LL-FL-350-40-UNV-N44-BZ-YM	350	49500	4000	120-277	4H*4V
LL-FL-350-30-UNV-N44-BZ-YM	350	48000	3000	120-277	4H*4V

### Accessories Ordering Information

Part #	Description
PC	Button Photocell, 120-277V
SUB"UNV" WITH "480"	480 Volt

\* Please contact LITELUME for all Custom Option Requests

### Buy American Act Compliant Ordering Information

Part #	Description
BAA-FL350	Buy America Act Compliant For Floodlight 350W

\* Please contact LITELUME for all Custom Option Requests