



LED Bollard Econolume Series



Description

The LITELUME™ Bollard Econolume Series (LL-BECO) features an anti-corrosion die-cast aluminum housing and high-impact polycarbonate lens. Parabolic cone with even 360 degree distribution. Easy installation for new construction and retrofit applications.

Applications: Security, Pathway, Perimeter, Pedestrian and Walkway lighting.

Fixture Information

Size:	21W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze
Power Factor:	.90
CRI:	80
Operating Temperature:	-40F - 122F
Voltage:	Standard: 120-277V
Dimming:	Standard: 0-10V
Sensor:	Standard: No sensor
Warranty:	5-Year Limited Warranty

Performance Data

Lumen Output:

2739 to 2785 lm

Lumens Per Watt (typical):

130 lm/W

CCT:

4000K
5000K

Distribution:

T5 120D

Lifespan:

100,000 hours

Ratings & Certificates

UL Listed for Wet Location
IP65

Complies with FCC Part 15, class A.
Complies with ICE61000-4-5, input transient surge protection (line-neutral = 4kV; line-&neutral-ground = 6kV).


Complies with RoHS (Restriction on Hazardous Substances) requirements.






Dimensions

Item	Diameter	Length	Weight
LL-BECO Round	6.3"	42.00"	8.4 lb
LL-BECO Square	6.3"	42.00"	12.7 lb

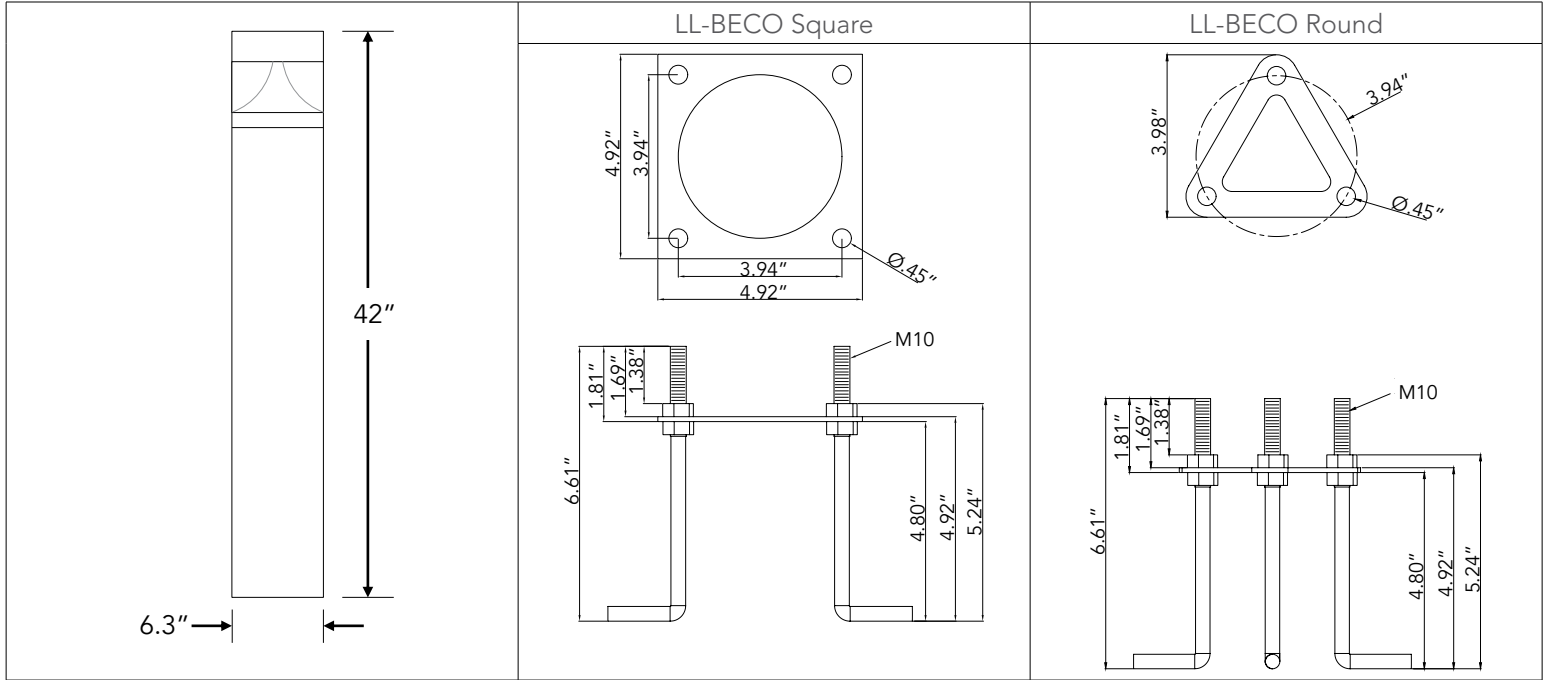

Photometric Data

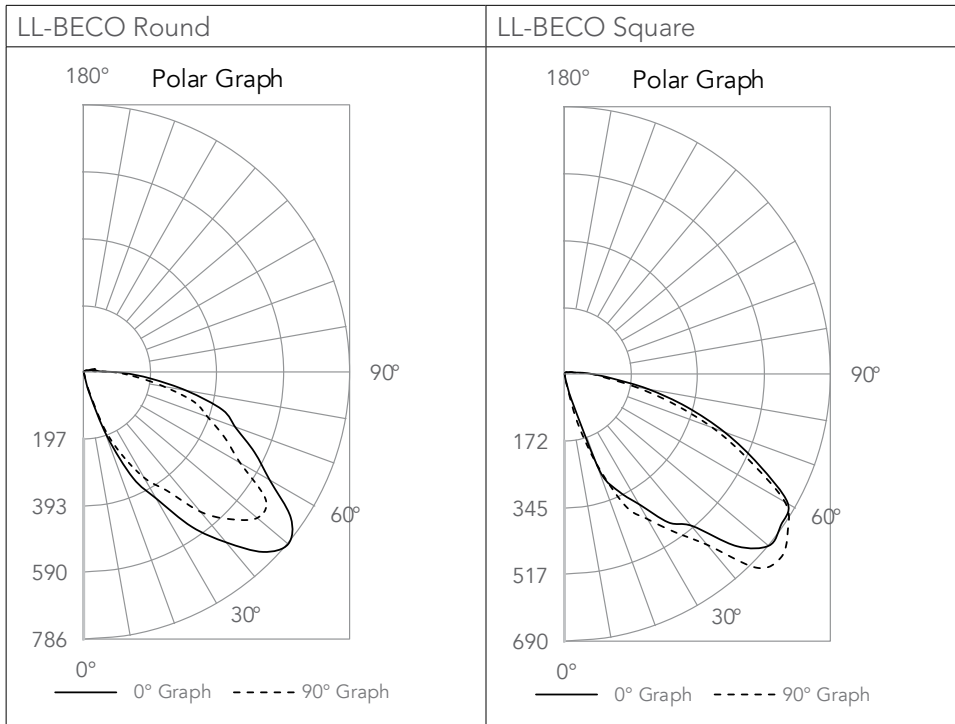



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Type Distribution
LL-BECOSQPFT6-21-50-UNV-BZ	21	2756	5000K	120-277	T5 120D
LL-BECOSQPFT6-21-40-UNV-BZ	21	2739	4000K	120-277	T5 120D
LL-BECORPFT6-21-50-UNV-BZ	21	2785	5000K	120-277	T5 120D
LL-BECORPFT6-21-40-UNV-BZ	21	2772	4000K	120-277	T5 120D

* Please contact LITELUME for all Custom Option Requests