



Wallpack Large



Description

The LITELUME™ Wallpack (LL-WPL) features a die-cast aluminum housing with a UV-resistant polycarbonate lens, suitable for commercial application.

Fixture Information

Size:	70W/100W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (GY)
Mounting:	Standard: Wall Mount
Lens:	Polycarbonate
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V
Power Factor:	.90
CRI:	80
Operating Temperature:	-40°F to 104°F
Sensor:	Standard: No sensor Custom: Button Photocell (120-277V)
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

9,600 to 13,200 lm

Lumens Per Watt (typical):

132-137 lm/W

CCT:

3000K
4000K
5000K

Lifespan:

Features Philip Lumileds with up to 100,000 running hours

Ratings & Certificates

UL Listed For Wet Location



Wattage Replacement

Existing Watts	Litelume Watts
250-400W	70W-100W

Quick Ship Ordering Information


Part #
LL-WPL-[70][100]-3CCT-UNV-BZ




Dimension

Item	Width	Length	Height	Weight
Wallpack Large	7.40"	14.21"	9.25"	15 lb
Wallpack Large w/Sensor	7.40"	14.21"	10.00"	15 lb

Without Sensor

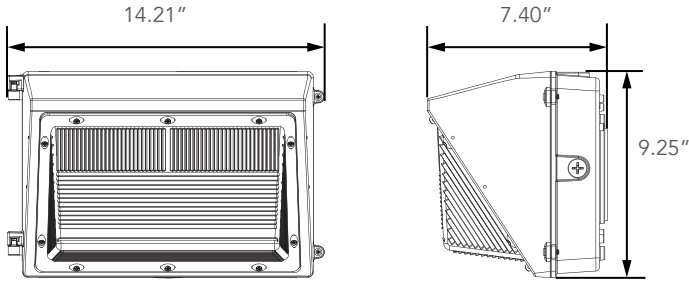


With Sensor

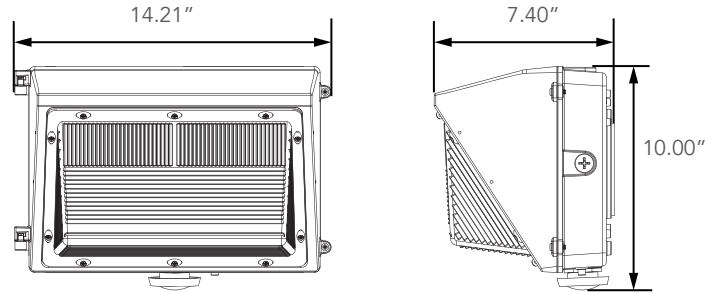

Photometrics

Luminous Intensity Distribution Curve

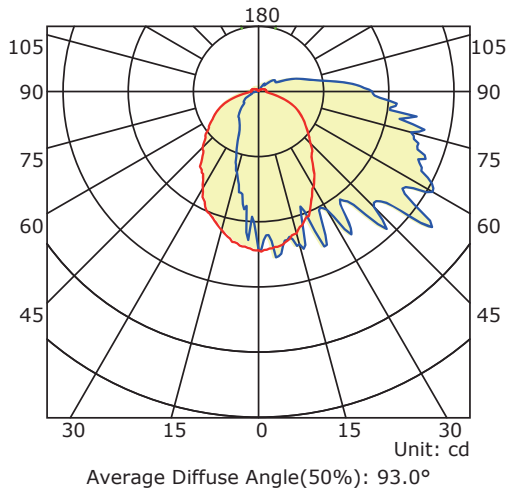



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Custom Option Available*
LL-WPL-[70][100]-3CCT-UNV-BZ	70W/100W	9600/13200	3000K/4000K/5000K	120-277	No

* Please contact LITELUME for all Custom Option Requests

Quick Ship Ordering Information

Part #
LL-WPL-[70][100]-3CCT-UNV-BZ

Accessories Ordering Information

Part #	Wattage
PC	Button Photocell, 120-277V
MS20	Bi-Level PIR Motion Sensor 20
LL-100	Remote Control 100
EM8	Emergency Battery Back Up 8W

* Please contact LITELUME for all Custom Option Requests

Buy American Act Compliant Ordering Information

Part #	Description
BAA-WPL	Buy American Act Compliant for Wallpack Large

* Please contact LITELUME for all Custom Option Requests